

DKM AC/DC Geared Motor and Gearhead

dkmmotor.com



DKM AC/DC Geared Motor and Gearhead

dkmmotor.com





Leading Automation -
DKM drives power of the world.

Management Philosophy

Trust and Value to the Customers

Core Value


Open Management
Speed Management
Quality Management
Customer-oriented Management

History

- | | |
|------|---|
| 1983 | The father company, 'Daekyung Machinery Co.' founded |
| 1987 | Developed 'Small Geared Motor' first time in Korea |
| 1990 | Starts export to overseas markets including China |
| 1993 | Acquired 'Q Mark' in Small Geared division from Korean government |
| 1994 | Acquired 'NT New Technology Mark' from Korean government |
| 1995 | Starts export to India, Indonesia and Malaysia |
| 1999 | Acquired CE (in some parts of Induction Motor) Advanced into Europe |
| 2000 | Changed company name to DKM Co., Ltd., the holding company |
| 2002 | Acquired ISO 9001:2000 |
| 2004 | Acquired 'CCC' certificate |
| 2005 | Established 'DKM Shanghai Co., Ltd.' in Shanghai, China |
| 2008 | Established 'DKM South Asia Pte Ltd.' in Singapore |
| 2009 | Established 'DKM Europe' in Germany |
| 2010 | Relocation and extension of global headquarters |
| 2011 | Unveiled a new corporate identity |




AC Geared Motor

Induction Motor

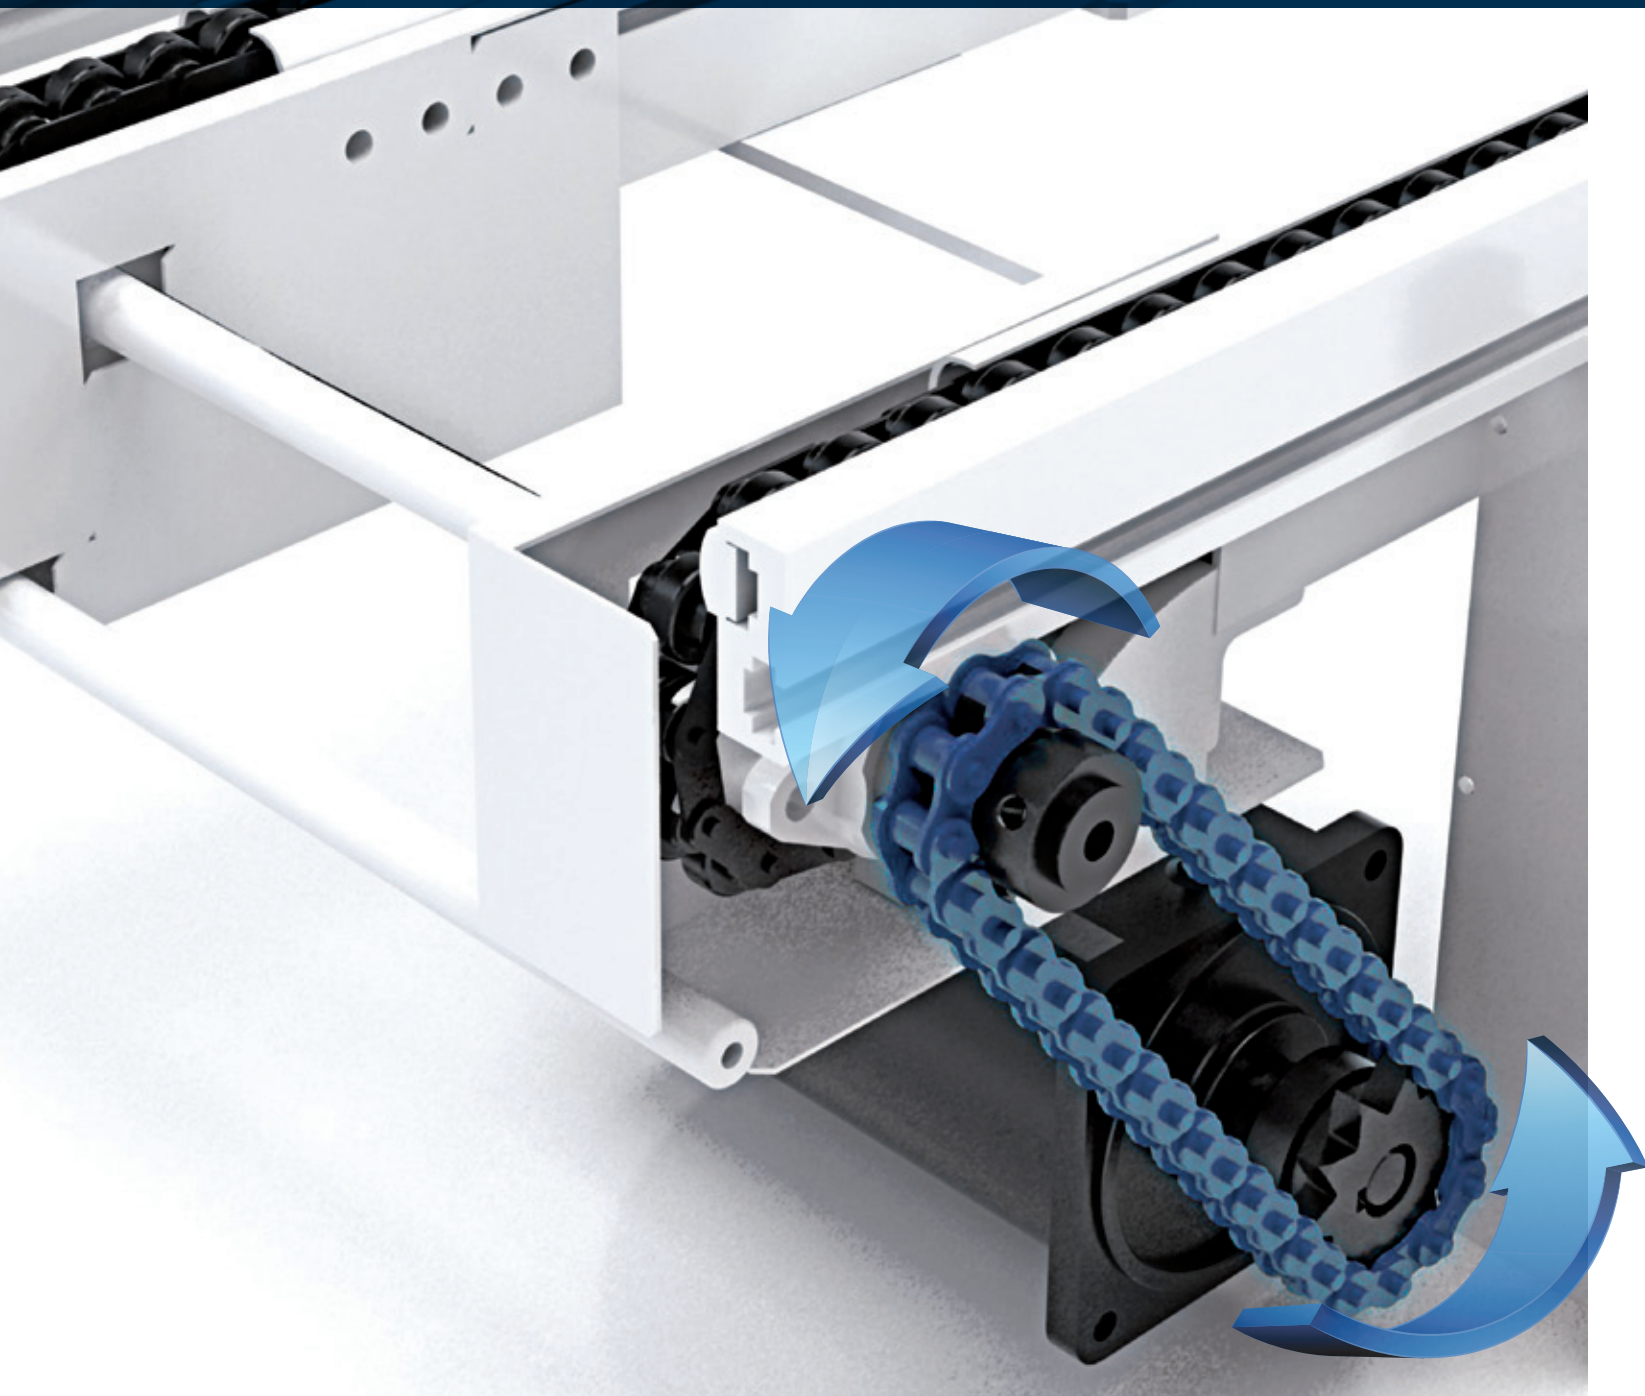

AC Geared Motor / Induction Motor

- Constant speed with continuous operation
- Stop in 2 sec. when switched off
- Over run: 30-40 times
- Possible for reverse rotation
- Rated operating time: Continuous run
- Frame Size: 60/70/80/90mm
- Output: 6W, 10W, 15W, 25W, 40W, 60W, 90W, 120W, 150W, 180W, 200W
- Voltage: Single phase 100V-115V, 200V-240V and three phase 200V-440V
- Connection: Lead wire type and terminal box type

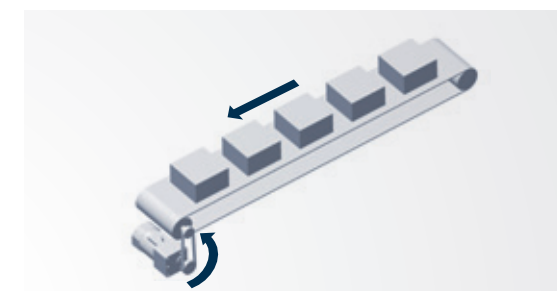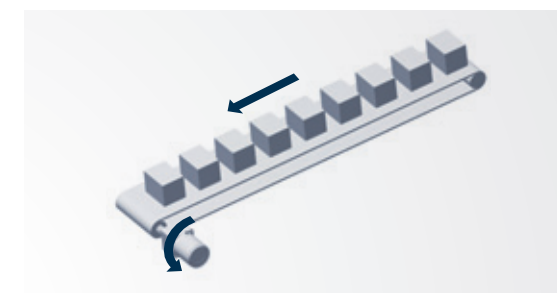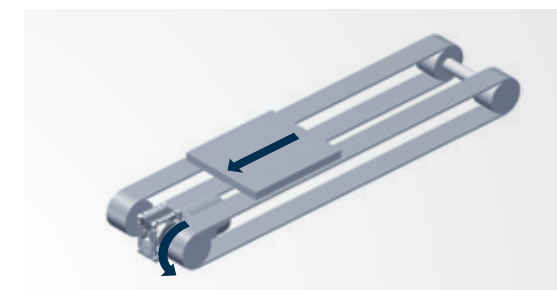


AC Geared Motor

2 Pole Motor




AC Geared Motor / 2 Pole Motor

- High speed rotation
- 3,600 RPM (60Hz)
- 3,000 RPM (50Hz)
- Used without gearhead
- Possible for reverse rotation
- Rated operating time: Continuous run
- Frame Size: 80/90mm
- Output: 15W, 25W, 40W, 60W, 90W, 120W, 150W, 200W
- Voltage: Single phase 100V-115V, 200V-240V and three phase 200V-440V
- Connection: Lead wire type and terminal box type

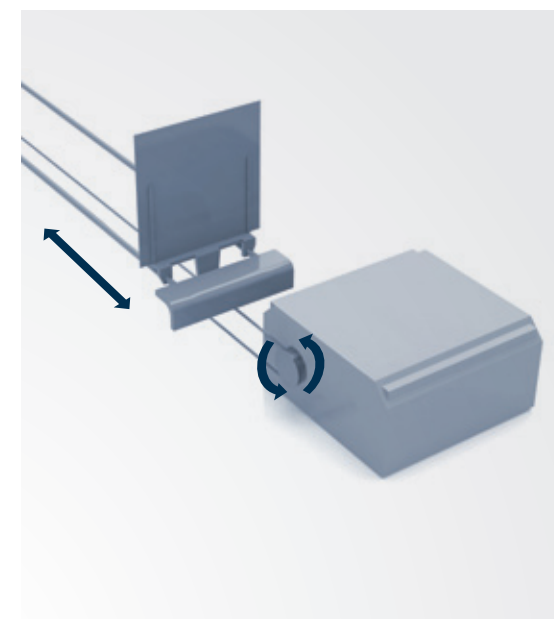




AC Geared Motor

Reversible Motor

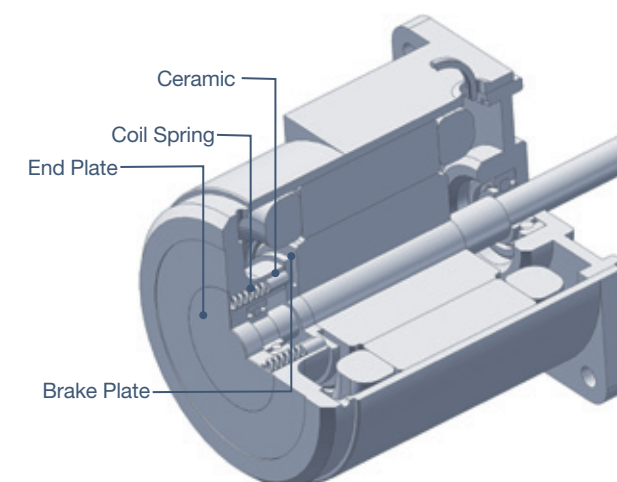


AC Geared Motor / Reversible Motor

- Suitable for frequent reverse operation
- Stop in 0.5 sec. when switched off
- Over run: 5-6 times
- Possible for reverse rotation
- Rated operating time: 30 min.
- Frame Size: 60/70/80/90mm
- Output: 6W, 10W, 15W, 25W, 40W, 60W, 90W, 120W
- Voltage: Single phase 110V-115V and 200V-240V
- Connection: Lead wire type and terminal box type

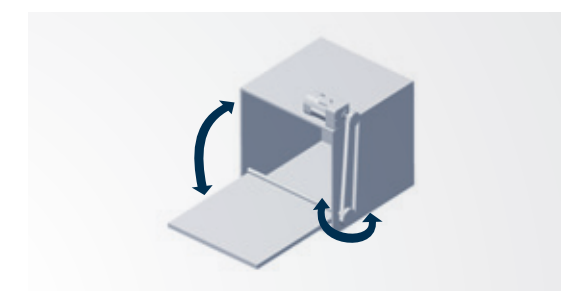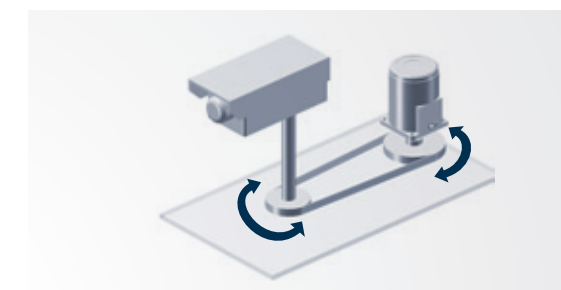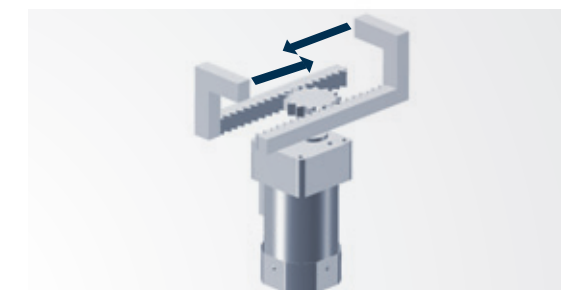



AC Geared Motor

Electromagnetic Brake Motor

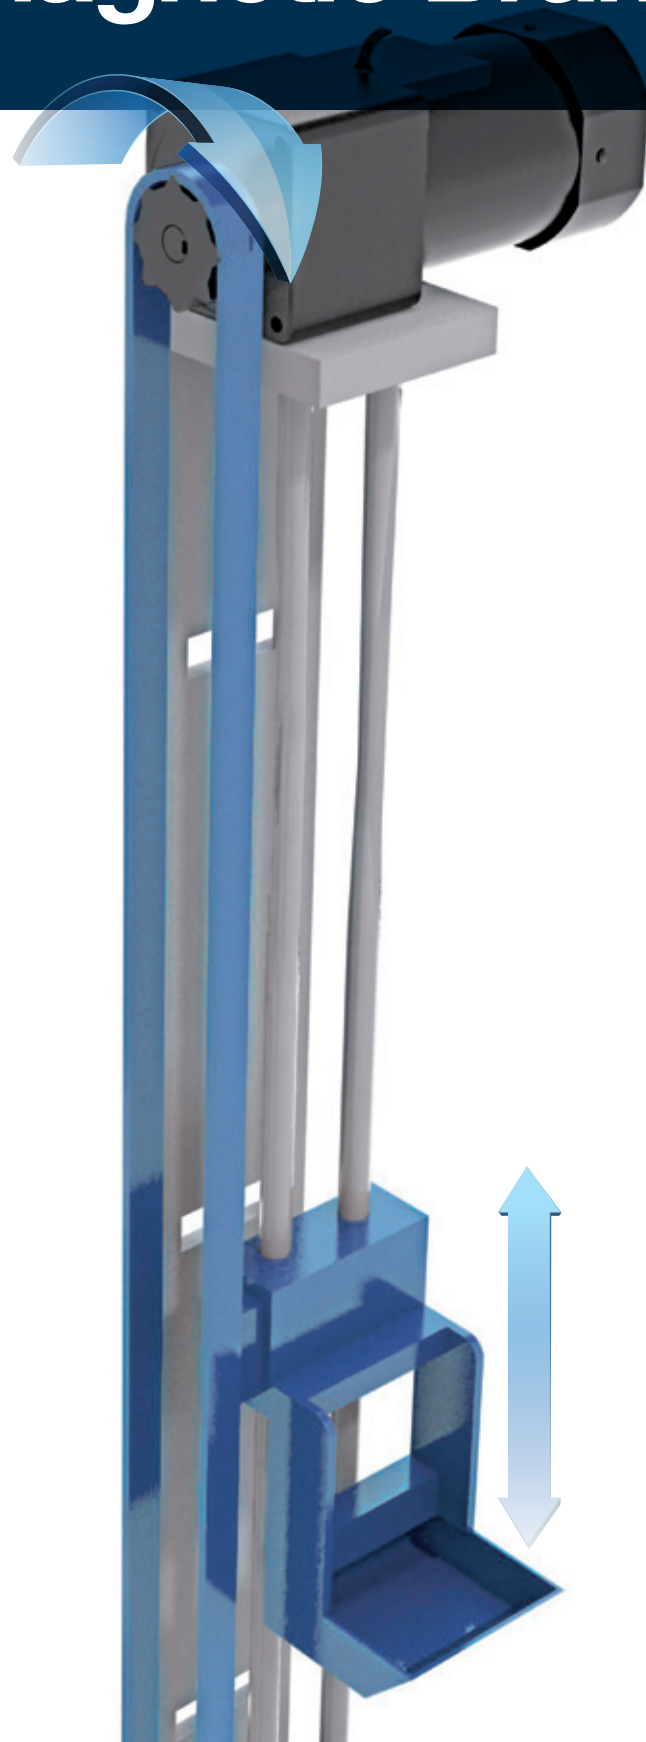


AC Geared Motor / Electromagnetic Brake Motor

- Suitable for operation where load should be maintained
- Stop in 0.2 sec. when switched off
- Over run: 2-3 times
- Possible for reverse rotation
- Rated operating time: 30 min. (Single phase), Continuous run (Three phase)
- Frame Size: 70/80/90mm
- Output: 6W, 10W, 15W, 25W, 40W, 60W, 90W, 120W, 150W, 180W, 200W
- Voltage: Single phase 100V-115V, 200V-240V and three phase 200V-440V
- Connection: Lead wire type

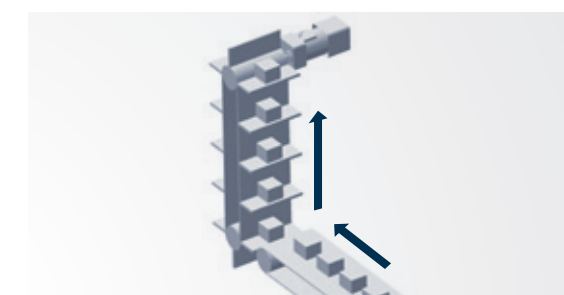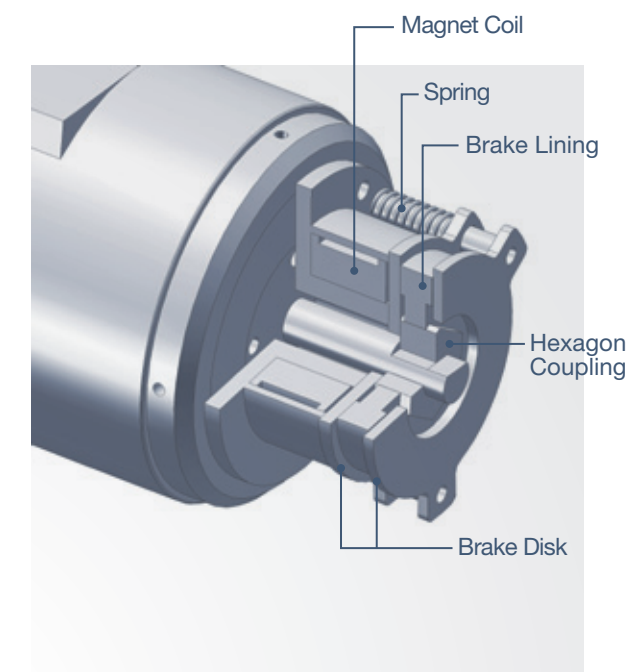

AC Geared Motor



Clutch & Brake Motor

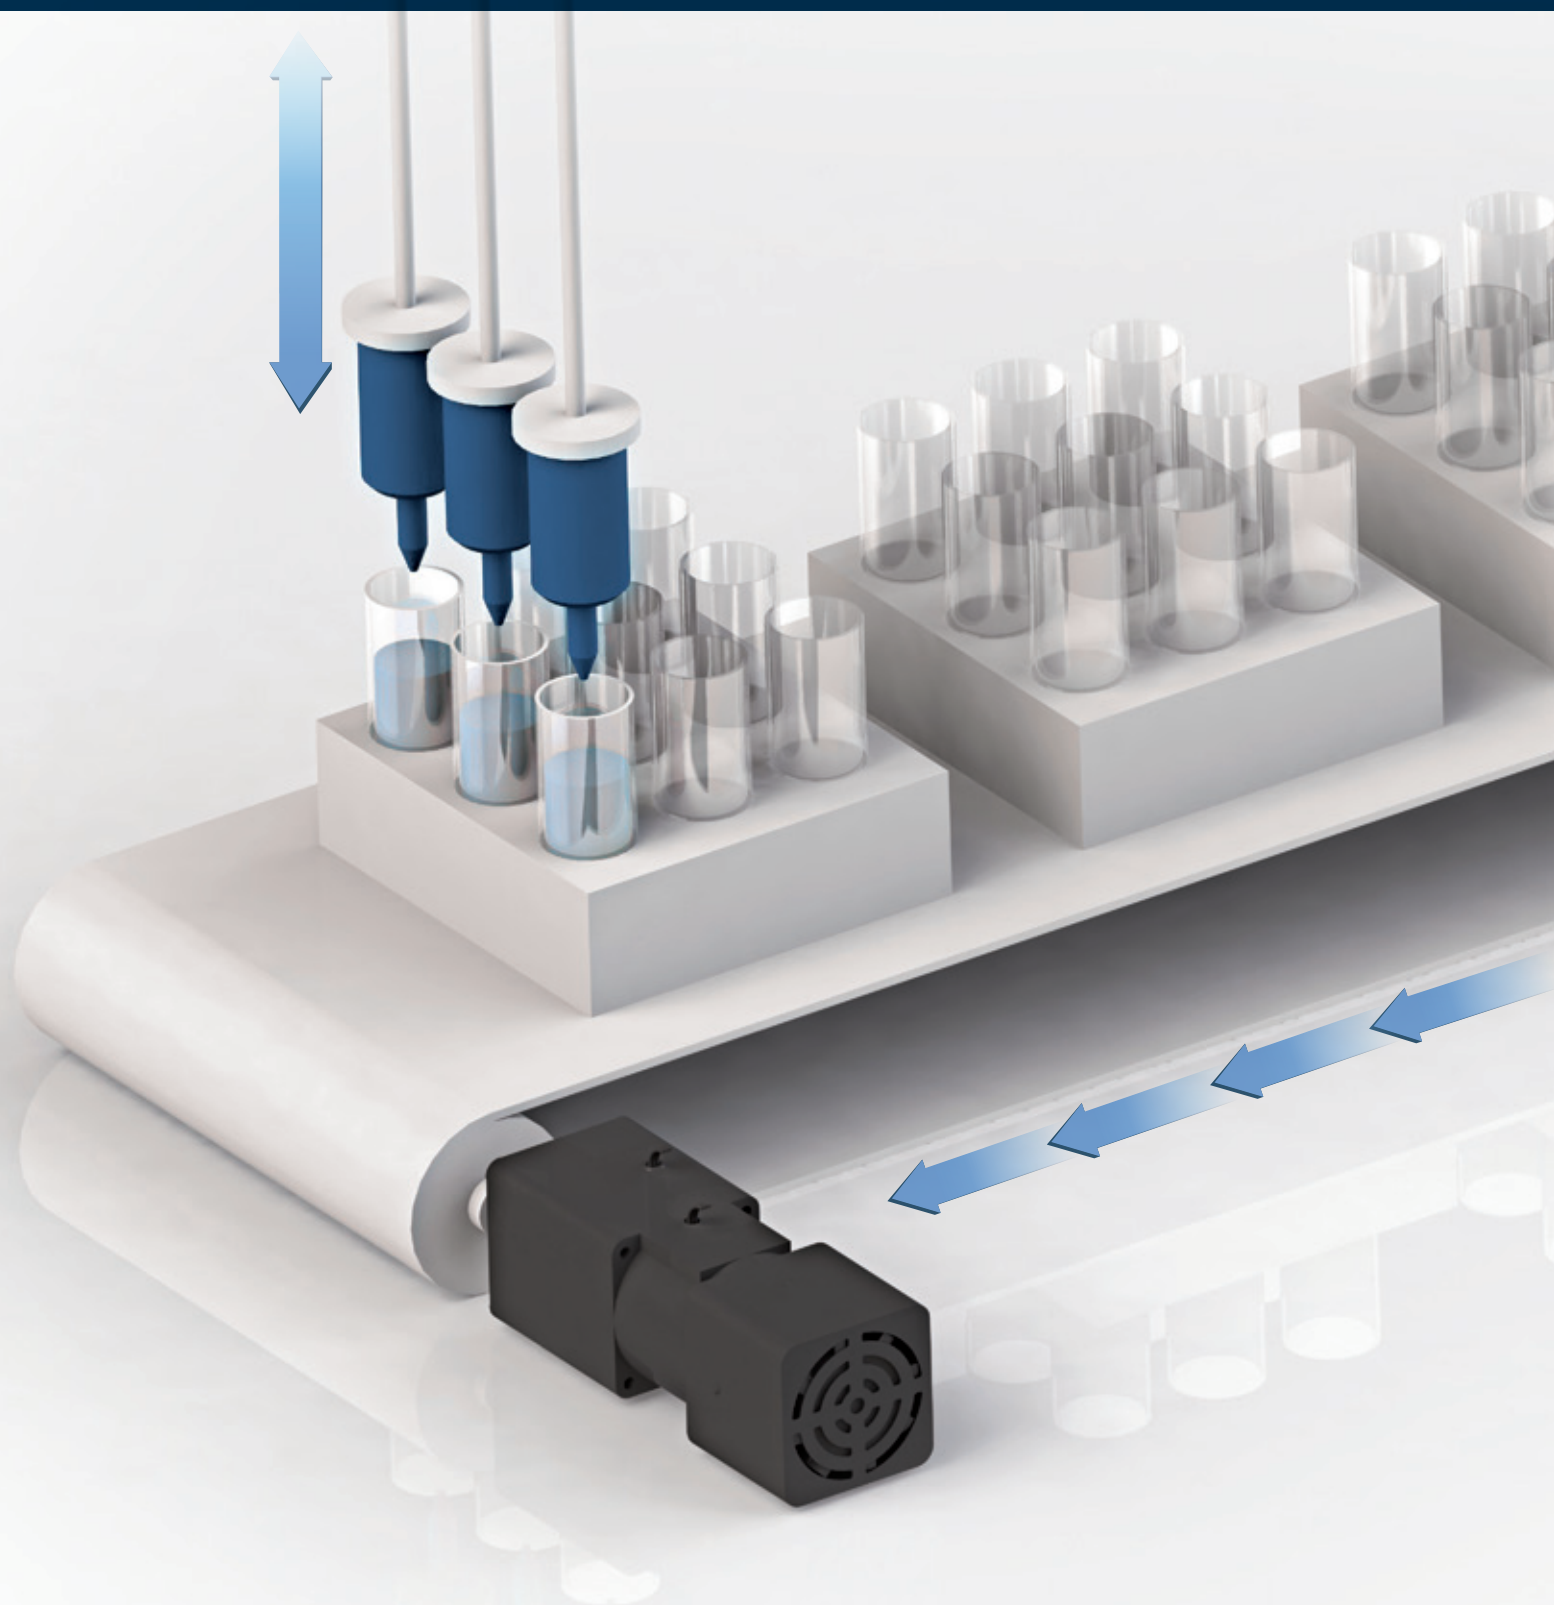

AC Geared Motor / Clutch & Brake Motor




- Suitable for high frequent start and stop operation
- Stop in 0.1 sec. when switched off
- Over run: 1 time
- Possible for reverse rotation
- Rated operating time: Continuous run
- Frame Size: 80/90mm
- Output: 15W, 25W, 40W, 60W, 90W, 120W
- Voltage: Single phase 100V-115V, 200V-240V and three phase 200V-440V
- Connection: Lead wire type

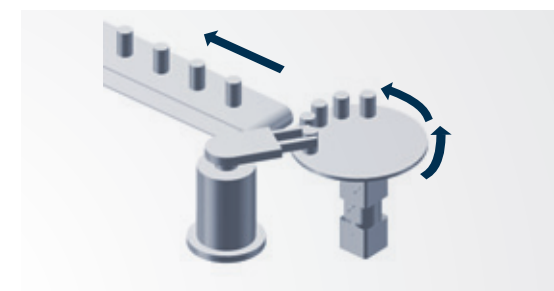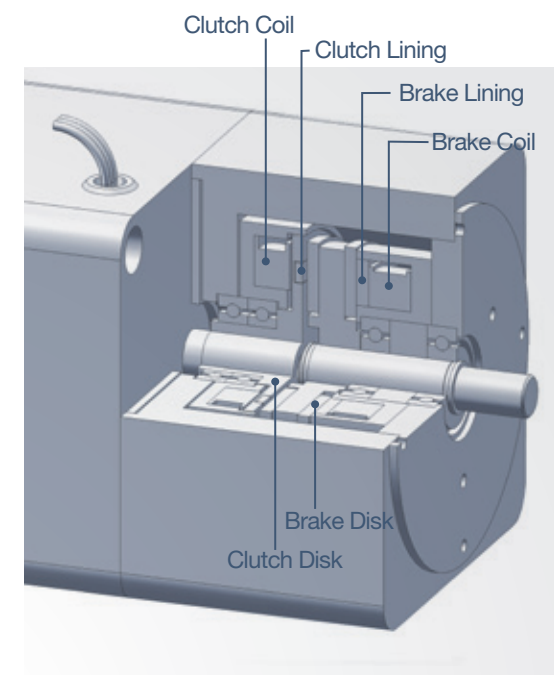

AC Geared Motor



Torque Motor

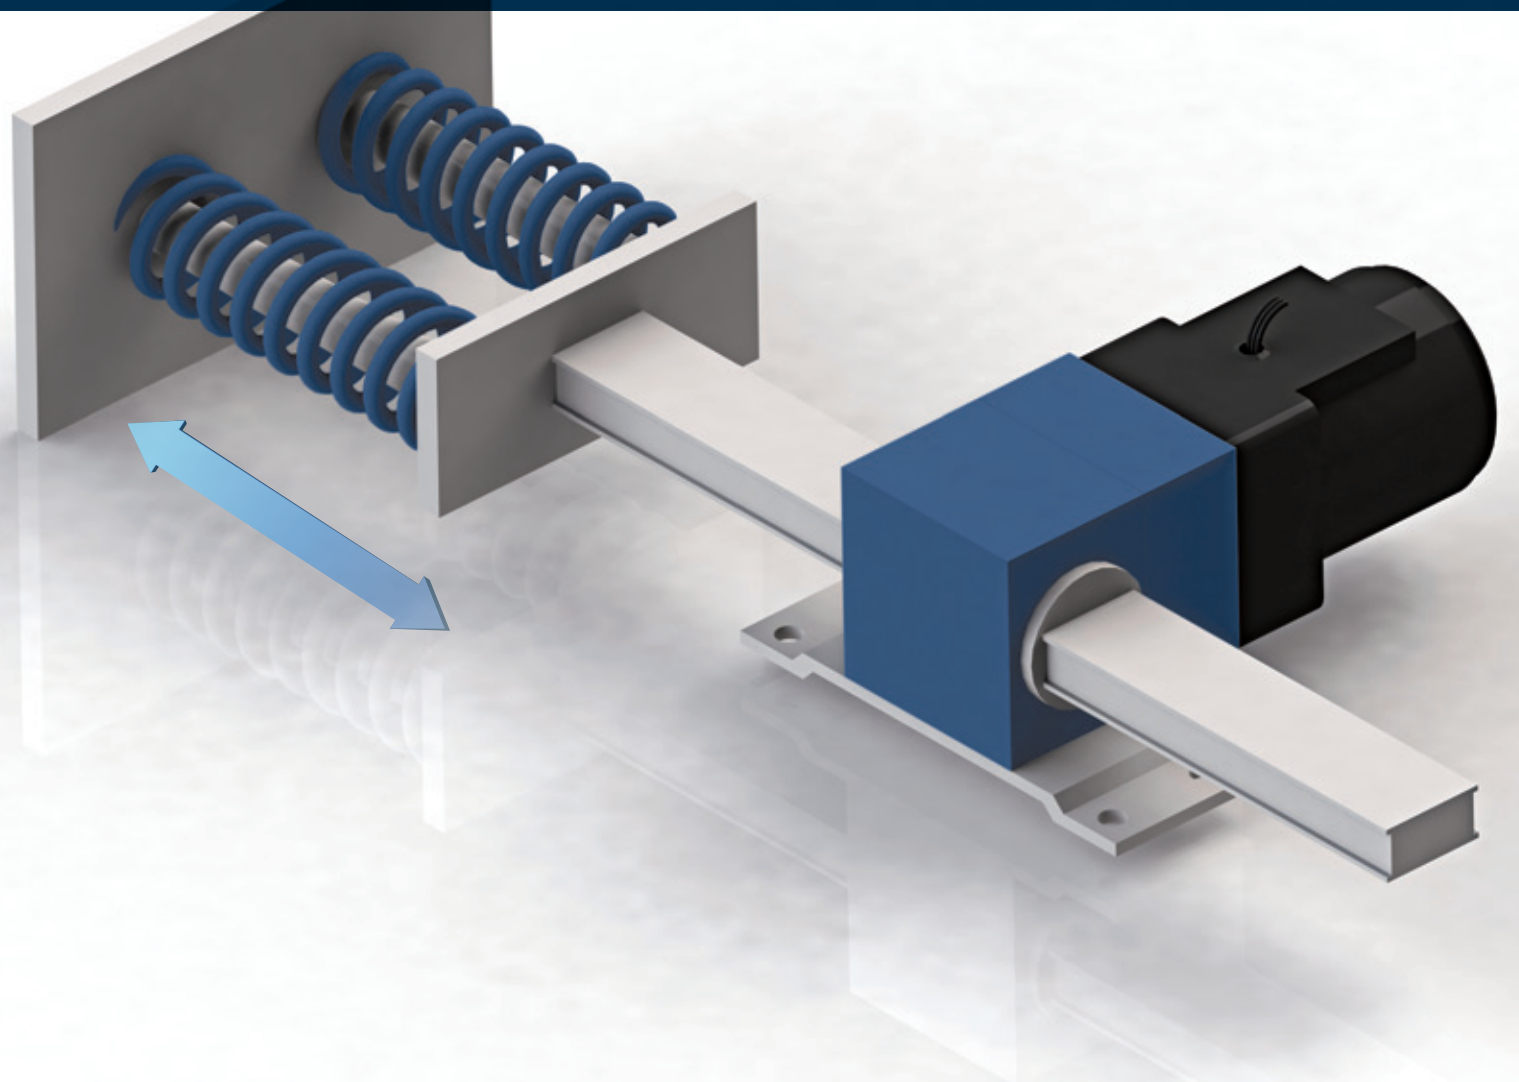

AC Geared Motor / Torque Motor




- Suitable for controlling tension and pushing in winding operations
- Possible for reverse rotation
- Easy control of motor torque by using torque controller
- By using the motor in the braking region of the speed-torque characteristics, it can be used as a brake.
- Possible for reverse rotation
- Rated operating time: 5 min. (with max. voltage), Continuous run (with 60% of max. voltage)
- Frame Size: 70/80/90mm
- Output: 6W, 10W, 20W, 30W, 40W
- Voltage: Single phase 100V-115V, 200V-240V and three phase 200V-440V
- Connection: Lead wire type

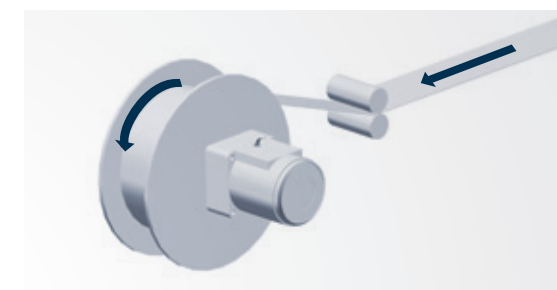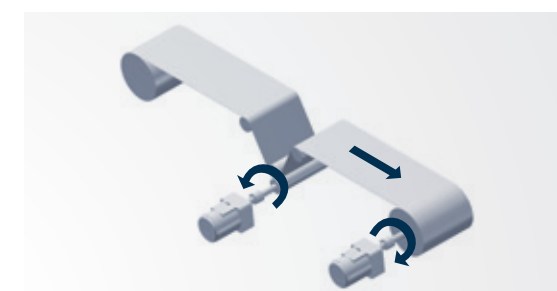

AC Geared Motor

Speed Control Motor

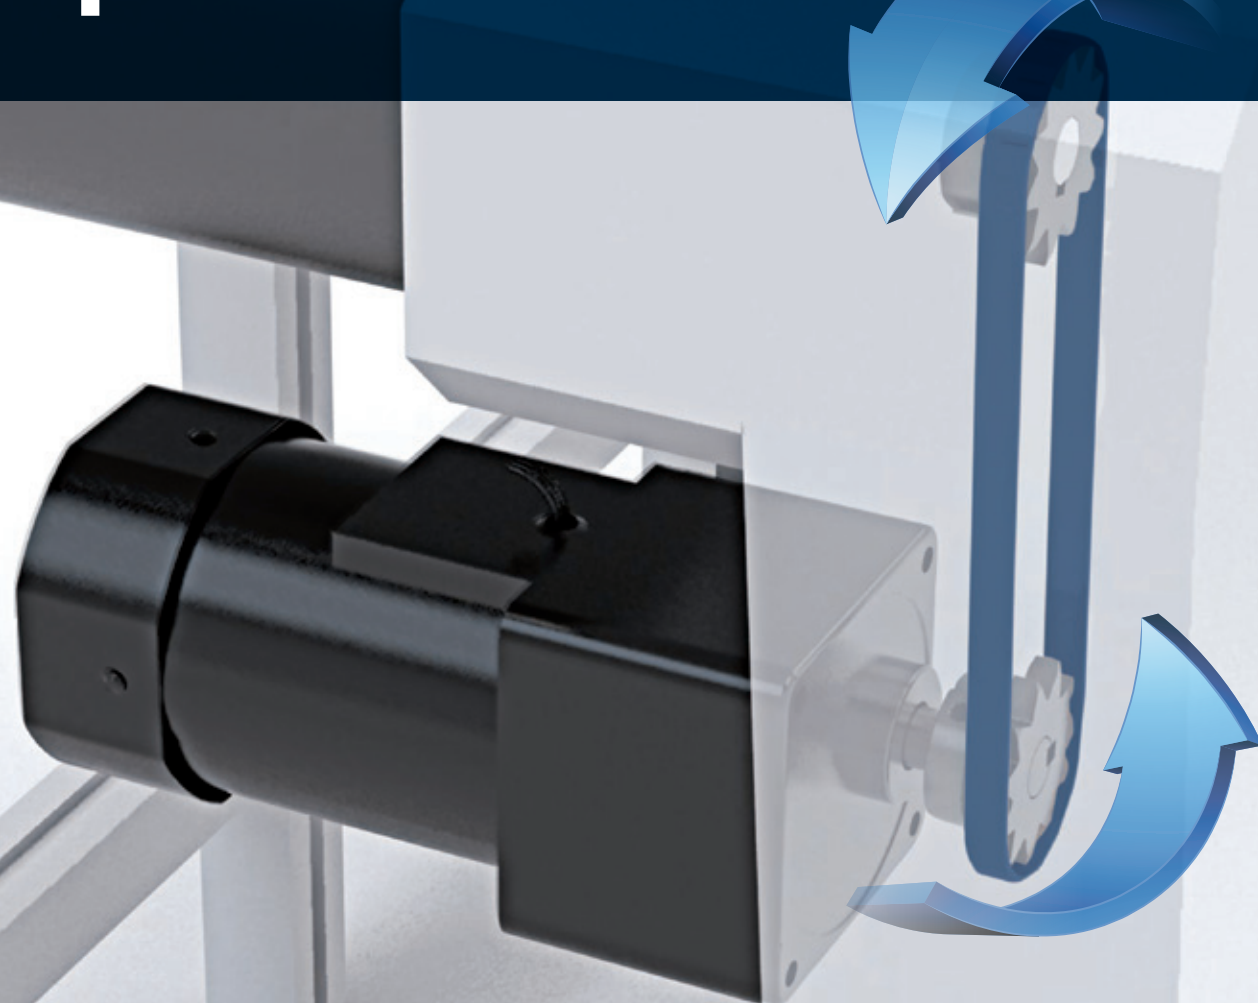


AC Geared Motor / Speed Control Motor

- Speed Control Motor allows you to set and adjust the speed of the motor easily by using speed controller
- Type: Speed Control Induction Motor, Speed Control Reversible Motor, Speed Control Brake Motor and Speed Control Clutch & Brake Motor

Speed Controller

- FX1000A: Front panel potentiometer, Unit type (Connecting motor with easy-to-use connector)
- DSK: Front panel potentiometer, Socket type (Connecting motor with socket)
- DSKS: Separate potentiometer, Socket type (Connecting motor with socket)

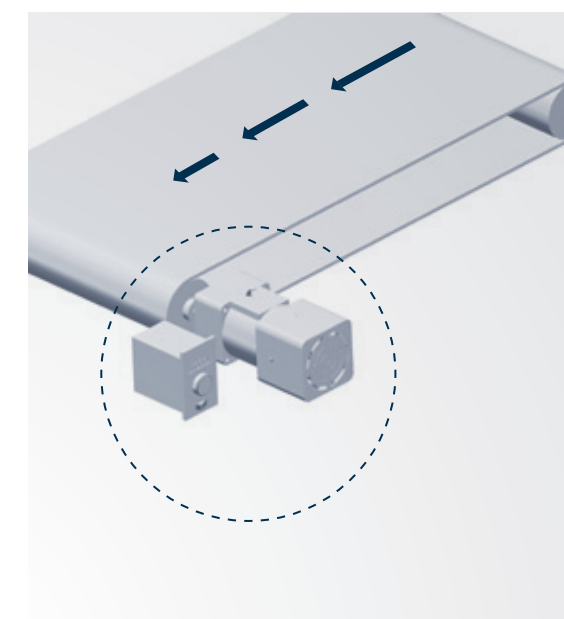

DC Geared Motor

- Big starting torque and high efficiency
- Easy to change the normal/ reverse rotation
- Available to manufacture low voltage motor which can be applied to portable machines with various specifications.
- Parallel and worm gearheads can be attached to DC motors.
- DSD Speed Controller enables to adjust the speed easily.
- Frame Size: 60/80/90mm
- Output: 15W, 25W, 40W, 60W, 90W, 120W
- Voltage: DC 12V, 24V, 90V
- Connection: Lead wire type

Speed Controller DSD

- Front panel potentiometer, Unit type
- Applicable to DC 90V motor
- Easy speed adjustment by potentiometer on front panel



Gearhead

Parallel Gearhead

- Frame Size: 60/70/80/90mm

General Box Type
(GB Type)



Powerful Box Type
(PB Type)



Powerful Flange Type
(PF Type)



High Powerful Box Type
(HB Type)



High Powerful Flange Type
(HF Type)



Worm Gearhead

Worm gearheads allow the motor to be installed at the right or left axis of equipment such as conveyor belts. Worm solid type and worm hollow type are available.

- Frame Size
Worm Solid Type: 80/90mm
Worm Hollow Type: 90mm

Worm Solid Type
(W Type, Left Output Shaft)



Worm Solid Type
(W Type, Right Output Shaft)



Worm Solid Type
(W Type, Bi-directional Output Shaft)



Worm Hollow Type
(WH Type)



Inter-decimal Gearhead

In case of requiring high gear ratio that cannot be generated by single gearhead, inter-decimal gearhead is used with general gearhead. In this case only speed will reduce by 10:1 without torque increasing.

- Frame Size: 80/90mm
- Gear Ratio: 10:1



Parallel gearhead, worm gearhead and inter-decimal gearhead are available to be attached to gear type motor which possess the wide range of gear ratio from 2:1 to 360:1.

DKM Gearheads and Gear Reduction Ratio

● = Available

Type		Motor Output	Gearhead Model	Gear Reduction Ratio																															
				2	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	80	90	100	120	150	180	200	250	300	360			
Parallel Gearhead	G Type	6W	6GBD□MH		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		●	●	●	●	●	●	●	●			
		6W, 10W,15W	7GBD□BMH		●	●		●	●	●		●	●	●		●	●	●		●	●	●		●	●	●	●	●	●						
		15W, 25W	8GBK□BMH		●	●	●	●	●	●		●	●	●		●	●	●	●	●	●	●		●	●	●	●	●	●	●	●	●	●		
		40W	9GBK□BMH	●	●	●	●	●	●	●	●	●	●	●		●	●	●	●	●	●	●		●	●	●	●	●	●						
	P Type	60W-120W	9PBK□BH/9PFK□BH	●	●	●	●	●	●	●		●	●	●	●	●	●	●	●	●	●	●		●	●	●	●	●	●						
	H Type	60W-200W	9HBK□BH/9HFK□BH		●	●		●		●		●	●	●	●	●	●	●		●	●	●		●	●	●	●	●							
Worm Gearhead	W Type	15W, 25W	8WD□BL/□BR/□BRL								●	● (12)	●	●		●	●	●		●	●														
		40W-120W	9WD□BL/□BR/□BRL								●	● (12)	●	●		●	●	●		●	●														
	WH Type	60W-200W	9WHD□						●		●		●		●	●	●		●	●	●		●												
Inter-Decimal Gearhead	15W, 25W		8XD10M*								●																								
	40W-200W		9XD10M*								●																								

Enter the gear ratio in the box(□) within the model name. Enter the model type of attaching gearhead (G/P/H/W/WH) in the place *.

DKM Global Network



HQ and Global Branches

DKM Korea Headquarters
DKM Motor Co., Ltd.
4F., Incheon Techpia Na-Bldg., 223-38, Seoknam2-dong, Seo-gu, Incheon, Republic of Korea
Tel. +82 32 574 7788 | Fax. +82 32 578 7787
www.dkmmotor.com | info@dkmmotor.com

DKM China
韩京机电（上海）有限公司
No. 555 Lianming Road Qibao Toun Minhang Shanghai, China 201101
Tel. +86 21 6461 9665 | Fax. +86 21 6459 5115
dh.kim@dkmmotor.com

DKM Singapore
DKM South Asia Pte Ltd
No.25, Woodlands Industrial Park E1, #05-01, Singapore 757743
Tel. +65 6365 1103 | Fax. +65 6365 1203
tllee@dkm-southasia.com.sg

DKM Europe
DKM Motor Co., Ltd.
Martin-Behaim-Strasse 12-14, 63263 Neu-Isenburg, Germany
Tel. +49 6102 369 9513 | Fax. +49 6102 369 9514
j.choi@dkmmotor.com

Global Agencies

Asia

India
Suvik Electronics Pvt. Ltd.
Plot No.: 102/A, GIDC
Engineering Estate, Sector-28,
Gandhinagar-382028.,
Gujarat, India
Tel. +91 79 23212001
Fax. +91 79 23212006
www.suvik.com
info@suvik.com

Indonesia
UD. DINAMIKA KARYA
MAKMUR
JL. Sunter Niaga III Blok
G 4/No.9 Sunter Agung
Podomoro Jakarta – Utara
14350, Indonesia
Tel. +62 21 6414647, 6519443
Fax. +62 21 6414675
dkm.indo@gmail.com

Israel
Soulutions
23 Hata’as st, Kfar-Sava,
44641, P.O.B 2483, Israel
Tel. +972 9 7457733
Fax. +972 9 7457734
www.soulutions.co.il
info@soulutions.co.il

Malaysia
Servo-Matic Technology
No.23A, Jalan Jati 2,
Taman Nusa Bestari Jaya,
81300 Skudai, Johor Bahru,
Johor, Malaysia
Tel. +607 511 4313
Fax. +607 511 6313
www.servo-matic.com.my
account@servo-matic.com.my

Thailand
Pneumax Co., Ltd.
107/1 Chaloe Phrakiat R. 9
Rd., Pravet, Bangkok 10250
Tel. +66 2 7268000
Fax. +66 2 7268260
www.pneumax.co.th
sales@pneumax.co.th

Vietnam
Dong A Electric Co., Ltd.
449/19 Su Van Hanh St., Ward
12, District 10, HCM City,
Vietnam
Tel. +84 8 3862 0048
Fax. +84 8 3862 0049
www.dongaelectric.com
donga-electric@vnn.vn

Europe

**Czech Republic /
Poland / Slovakia**
RAVEO s.r.o.
Třída Tomáše Bati 332,
Otrokovice 765 02,
Česká Republika
Tel. +420 577 663 875
Fax. +420 577 663 875
www.raveo.cz
info@raveo.cz

Germany
Ott GmbH & Co. KG
Baarstrasse 3,
78652 Deisslingen, Germany
Tel. +49 7420 93990
Fax. +49 7420 939925
www.ott-antriebe.de
info@ott-antriebe.de

Powertronic Drive Systems
GmbH
Hartmannstr. 36,
12207 Berlin, Germany
Tel. +49 30 771 9635
Fax. +49 30 771 5036
www.power-tronic.com
info@power-tronic.com

Italy
Pamoco S.p.a.
Via R. Lombardi, 19/6,
20153 Milano, Italy
Tel. +39 02 3456091
Fax. +39 02 33104342
www.pamoco.it
info@pamoco.it

Lithuania
WEG Baltic IS, UAB
Berzu 8, 36233 Panevezys,
Lithuania
Tel. +370 45 508408
Fax. +370 45 508409
www.techselis.eu
info@techselis.eu

Russia
Electroprivod Ltd.
29A, Vyborgskaya emb.,
St.-Petersburg, 194044,
Russian Federation
Tel. +7 812 703 09 81
www.electroprivod.ru
sale@electroprivod.ru

Turkey
ÖzmaK
Ikitelli O.S.B. Tumsan San.Sit.,
2.Kisim C Blok No:24,
Istanbul, Turkey
Tel. +90 212 485 10 52
Fax. +90 212 485 10 54
www.ozmak-as.com.tr
ozmak@ozmak-as.com.tr

The Americas

Mexico
Electronica Industrial
Y Pirometria,S.A DE C.V.
Isla Tortuga No. 2621,
Guadalajara, Jal. Mexico
Tel. +33 38 10 02 44
Fax. +33 80 10 03 69
www.pirometria.com
ventas@pirometria.com



DKM Motor Co., Ltd.

4F., Incheon Techpia Na-Bldg., 223-38,
Seoknam2-dong, Seo-gu, Incheon,
Republic of Korea

Tel. +82 32 574 7788 | Fax. +82 32 578 7787
www.dkmmotor.com | info@dkmmotor.com

Printed in Korea 09/2011

